



Add: 2559 Seneca Tpke, Canastota, NY 13032 TEL :
+1-929-777-1741 E-mail :
nate@cnygreenteam.com
Website: www.cnygreenteam.com
Standard: 130lm/w (clear cover)
Lumen Plus: 150lm/w (clear cover)

Perfectly suitable for industrial use due to IP65 rating
High Color Fidelity through use of High Quality CRI 80Ra LED Chips
D-Mark tested for the use in paper production, wood processing etc.



Greenline Linear High Bay Price List

2017-4-18

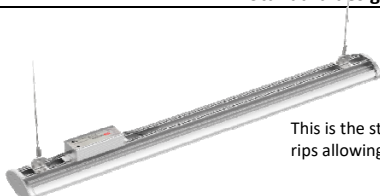
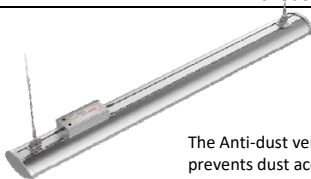
Standard: 120~130lm/w

Model No.	Specification										
	Size	Rated Power	Input Voltage	LED Quantity	Color Temperature	Luminous flux	CRI	Materials	Beam Angle	IP Grade	Meanwell driver
GT10B-60W	605*135*72mm	60W	AC100~277V5 0~60Hz	210PCS SMD2835	3000K/4000K 5000K/6000K	7500lm	>80	Aluminum & PC Cover	120°	IP65	SLG60-48A
GT10B-100W	905*135*72mm	100W	AC100~277V5 0~60Hz	294PCS SMD2835	3000K/4000K 5000K/6000K	12500lm	>80	Aluminum & PC Cover	120°	IP65	CLG150-48A
GT10B-150W	1205*135*72mm	150W	AC100~277V5 0~60Hz	420PCS SMD2835	3000K/4000K 5000K/6000K	18500lm	>80	Aluminum & PC Cover	120°	IP65	CLG150-48A
GT10B-200W	1505*135*72mm	200W	AC100~277V5 0~60Hz	588PCS SMD2835	3000K/4000K 5000K/6000K	25000lm	>80	Aluminum & PC Cover	120°	IP65	HLG240-48A


Lumen Plus :140~150lm/w

Model No.	Specification										
	Size	Rated Power	Input Voltage	LED Quantity	Color Temperature	Luminous flux	CRI	Materials	Beam Angle	IP Grade	Meanwell driver
GT10B-80W	605*135*72mm	80W	AC100~277V5 0~60Hz	336PCS SMD2835	3000K/4000K 5000K/6000K	11200lm	>80	Aluminum & PC Cover	120°	IP65	HLG80-48A
GT10B-120W	905*135*72mm	120W	AC100~277V5 0~60Hz	588PCS SMD2835		16800lm	>80	Aluminum & PC Cover	120°	IP65	CLG150-48A
GT10B-150W	1205*135*72mm	150W	AC100~277V5 0~60Hz	672PCS SMD2835	3000K/4000K 5000K/6000K	21000lm	>80	Aluminum & PC Cover	120°	IP65	CLG150-48A
GT10B-180W	1205*135*72mm	180W	AC100~277V5 0~60Hz	672pcs SMD2835	3000K/4000K 5000K/6000K	25000lm	>80	Aluminum & PC Cover	120°	IP65	HLG185-48A
GT10B-200W	1505*135*72mm	200W	AC100~277V5 0~60Hz	1008PCS SMD2835	3000K/4000K 5000K/6000K	28000lm	>80	Aluminum & PC Cover	120°	IP65	HLG240-48A
GT10B-240W	1505*135*72mm	240W	AC100~277V5 0~60Hz	1008PCS SMD2835	3000K/4000K 5000K/6000K	33600lm	>80	Aluminum & PC Cover	120°	IP65	HLG240-48A

Your choice for the design

Standard design	Anti-dust design
 This is the standard version. It has open cooling ribs allowing for good heat dissipation	 The Anti-dust version has a closed backside. This prevents dust accumulation and it makes the product easy to clean

Included accessories

 These corrosion and aging resistant brackets are included. The position can be adjusted by loosening the screws.	 These stainless steel hanging ropes are also included. Its weight capacity is 30Kg.
---	---



Optional accessories



Inventronics DALI dimmable driver.
\$40 (extra cost upon meanwell driver price)



IP65 motion sensor
Brand: Merrytek, detection range: 15m high
\$46

Technical Details

Electrical data	
Operating frequency	47-63HZ
Type of current	AC100~277V
Power factor λ	>0.9
Efficiency in %	>92%
Start time	0.1S
Warm-up time to 60 %	0.5S

Lifespan	
Rated nominal Lifetime	5 Years
Switching cycles	100,000 times
Lumen maintenance at e.o.l.	70%

Standards & Certification	
Type of protection	IP65
Tested dielectric strength	3.75KVac
Safety features	Open circuit protection; short circuit protection; over-voltage protection
Certificates	American market: UL, DLC Premium, cUL European market: TUV, GS, CB, CE, RoHS Australian market: SAA, Ctick
Energy efficiency class	A+, A++

Photometrical data	
Available light colors	warm white; natural white; daylight white
Available color temperatures	3000K; 4000K; 5000K; 6000K
Color rendering Index Ra	>80
Standard deviation of color matching	<3
UGR (Unified Glare Rating)	<27
Available beam angles	120°

Temperatures & operating conditions	
Operating temp	20~+69°C
Ambient temperature	-30~+50°C
Storage temperature	-40~+80°C

Features/Capabilities and additional product data	
Base/Socket	Directly wired
Dimmable	1-10V dimmable, DALI dimmable,

Notes

- 1) Prices are on EXW basis; Price is valid in 30 days
- 2) Payment Term: T/T in advance for samples; 30% deposit and 70% balance paid before shipment
- 3) Payment Method: Paypal, Western Union, T/T, L/C
- 4) Delivery Time: 3~5 working days for sample order and 7-15 working days for formal order
- 5) MOQ: 1pcs

For more detailed technical information about this product, please refer to the catalog or the

We reserve the right to revise or update this price list without notice.