



GT-LED-CDL-8IN-22W-R

Fixture Class: 8" Fixed Recessed

3CCT
Selectable

Product Description

The GT-LED-CDL-8IN-22W-R LED 8" commercial downlight includes two switches on the unit which allows for adjustment of the input power 10W/15W/22W, lumen output 1000lm/1500lm/2000lm, and color temperature 3000K/3500K/4000K. This downlight is made for easy installation in new construction, remodel, and retrofit projects. Its 90+ CRI and frosted lens allow for true color rendering to bring out vivid colors throughout, and glare-free lighting making it ideal for commercial use in retail spaces, hospitals, offices, and airports. Features include: 0-10V dimming, 3CCT selectable, 3 Wattage Selectable, wet rated, JA8, IC Rated, and Energy Star.

*Available accessories include an 8" goofing and mounting plate.



Estimated Energy Cost:

\$1.20 per year
\$1.80 per year
\$2.65 per year

*Note: Design, features and specifications subject to change without notice. Some features may not be available on all models. Please visit CNYGreenTeam.com for more information.

Specifications

Input Power	Input Voltage	Lumen Output	Beam Angle	Center Beam	CCT
22 W	AC 120-277V	2000 lm	90°	N/A	4000K

CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan
90+	96 lm/W	0.9	0.185-0.06 A	Wire	50,000 Hrs.
Phases	Input Power	CCT	Lumen Output	Luminous Efficacy	Estimated Yearly Cost
Phase 1	10 W	3000K	1000 lm	96 lm/W	\$ 1.20
Phase 2	15 W	3500K	1500 lm	96 lm/W	\$ 1.80
Phase 3	22 W	4000K	2000 lm	96 lm/W	\$ 2.65

Product Features



0-10V Dimmable



Energy Efficient



3CCT Selectable




Wet Rated



Abutted & Covered

Product Dimensions

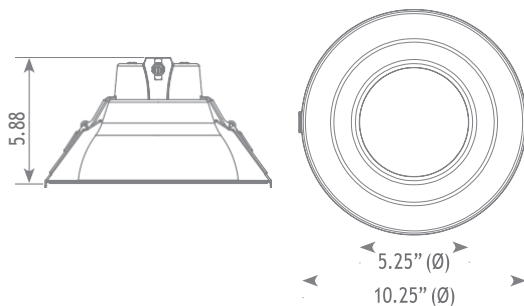

Product Photometric Data

CURRENTLY
NOT AVAILABLE

