



Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog #: _____

LED MUFL Flood Light Series

FEATURES

- IP66 rated
- Easy installation and maintenance
- No Mercury or UV
- Daylight sensor available
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships

Special Order:

- Other CCTs



100W



150W



200W



240W

CONSTRUCTION:

Aluminum housing with polyester powder-coated finish.

OPTICAL SYSTEM:

Nichia 3030 LED chips. High quality tempered glass optics. 120° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-347V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Bracket mounting.

DIMMING:


Continuous dimming to 10% or below.




MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
GT-MUFL-100W50KD	100W	14,200LM	142LM/W	70	0.9	15%	200W – 250W
GT-MUFL-150W50KD	150W	21,750LM	145LM/W	70	0.9	15%	300W - 400W
GT-MUFL-200W50KD	200W	29,000LM	145LM/W	70	0.9	15%	500W - 600W
GT-MUFL-240W50KD	240W	34,800LM	145LM/W	70	0.9	15%	500W - 600W

Series	Wattage	Color Temperature	Voltage
GT-MUFL	100W 150W 200W 240W	5000K	LV = 120-277V


MEASUREMENTS

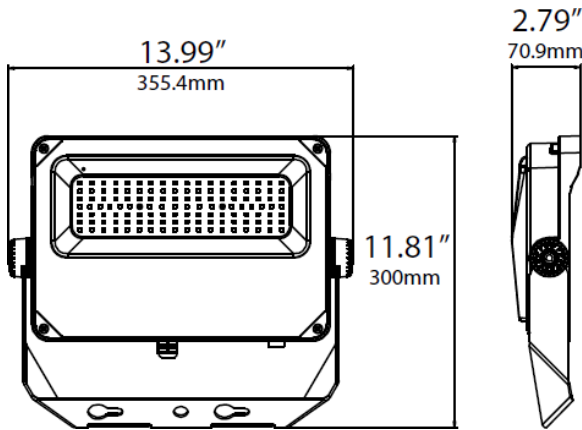

100W

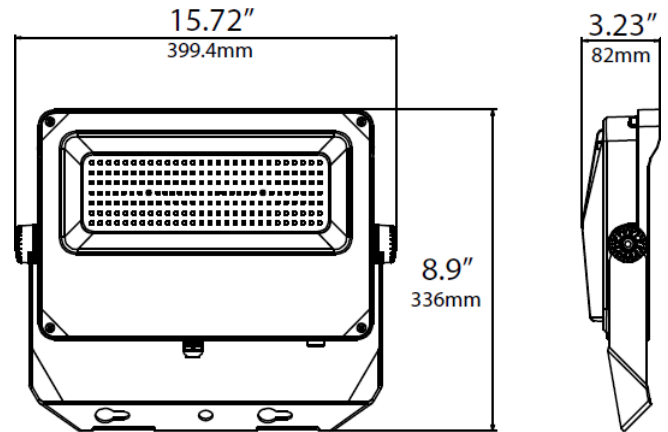

150W

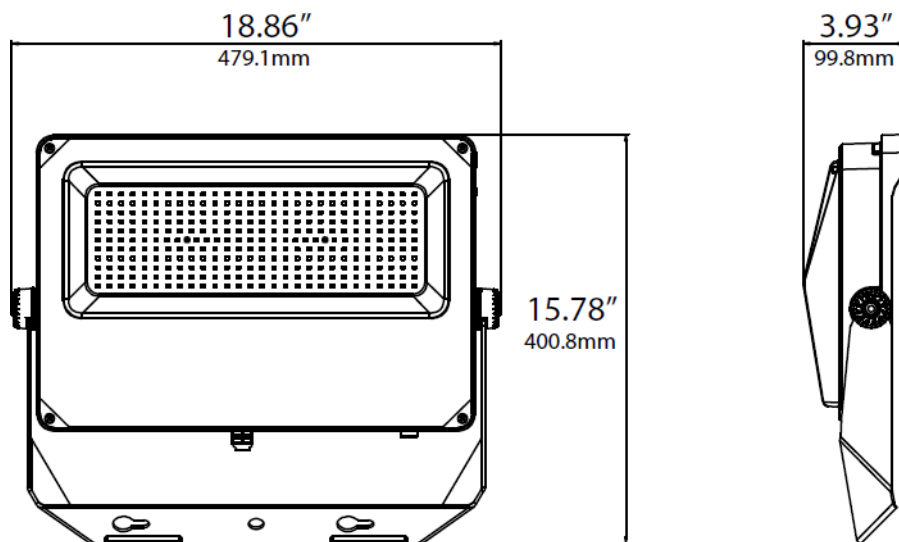

200W and 240W

MODEL	QUANTITY	WEIGHT	UPC CODE
GT-MUFL-100W50KD	1	lbs	00810050941389
GT-MUFL-150W50KD	1	lbs	00810050941396
GT-MUFL-200W50KD	1	lbs	00810050941402
GT-MUFL-240W50KD	1	lbs	00810050941419